


电机特性参数/ELECTRICAL PARAMETER

| | |
|---|--|
| 步距角/STEP ANGLE | 1.2° ± 5% |
| 相数/NO. OF PHASES | 3 |
| 额定电压/RATED VOLTAGE | 11.9V |
| 额定电流/RATED CURRENT | 7.0A |
| 电阻/RESISTANCE | 1.7ohm ± 10% AT 25°C |
| 电感/INDUCTANCE | 22mH ± 20% AT 1kHz, 1Vrms |
| 保持力矩/HOLDING TORQUE | 20.0N.m |
| 运行力矩/(AT —PPS) RUNNING TORQUE(AT —PPS) | ——以上/MIN (——V.DC, ——A/相(PHASE), ——相励磁/EX) |
| 绝缘耐压/DIELECTRIC STRENGTH | 1500V A.C 1分钟/MINUTE |
| 绝缘电阻/INSULATION RESISTANCE | 100MΩ 以上/MIN. |
| 绝缘等级/INSULATION CLASS | CLASS B |
| 温度上升/TEMPERATURE RISE | 80K MAX. |
| 转子惯量/ROTOR INERTIA | 19.8kg.cm ² |
| 重量/WEIGHT | 约11.0kg /APPROX. 克/g |
| 运行环境温度/OPERATION AMBIENT TEMP. | -20°C——+50°C |
| 运行环境湿度/OPERATION AMBIENT HUM. | 15%——90% |

接线图/WIRING DIAGRAM

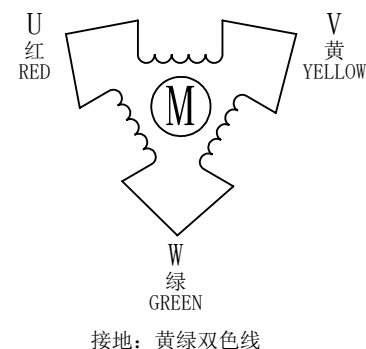

已受控

| | | | | | | | | | |
|--|----------|-------------|-------------|-----------------|-------------------|----------|------------|----------------------------------|---|
| CONFIRMED&ACCEPTED BY COTUMER (客户确认&接受) | | | | | | | | | |
| COMPANY CHOP&SIGNATURE (盖章&签名) | | | | | | | | | |
| 一般公差 TOLERANCE | ±0.3/±3° | 版本 REV. | 年月日 DATE | 变更番号 ECR NO. | 变更内容 REVISIONS | 设计 BY | 备注 NOTE | REV. | A |
| 设计/DESIGNED | 陈少卿 | 比例 SCALE | | 型号/MODEL | | | | 三维图 THIRD ANGLE PROJECTION | |
| 审核/CHECKED | 潘国强 | 单位 UNIT | mm | 110BM200-V2.0 | | | | 1/1 | |
| 深圳锐特机电技术有限公司 | | | | | | | 页 SHEET | 1/1 | |

备注(NOTE):

- 额定电流，两相同时通电/AT RATED CURRENT, TWO PHASES ON.
- 热阻法：电机安装在84*84*T5的铝板上，电机线圈两端通额定电压，OPPS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84*84*T5 AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPPS, 2PHASE ON.
- 寿命测试条件：整步，运行速度为500PPS，轴承的表面温度不超过70° C LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.